


Output Protection

The DSP-WR 1U series is fully protected from Reverse EMF through thoughtful design, as shown below. The freewheeling diodes are rated 20% above any anticipated load.

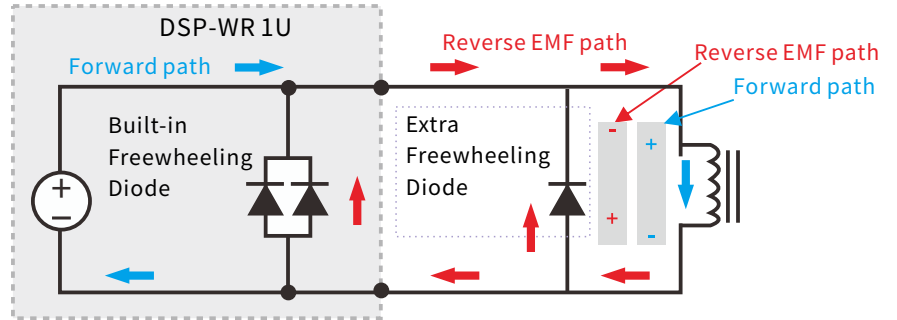

- *1. For high-inductance loads or long duty cycles, install a freewheeling diode close to the load. The diode should be rated at least 1.2 times the power supply's rated output current or match the load capacity.